


# TEWMCL - PORTABLE WASH BAY

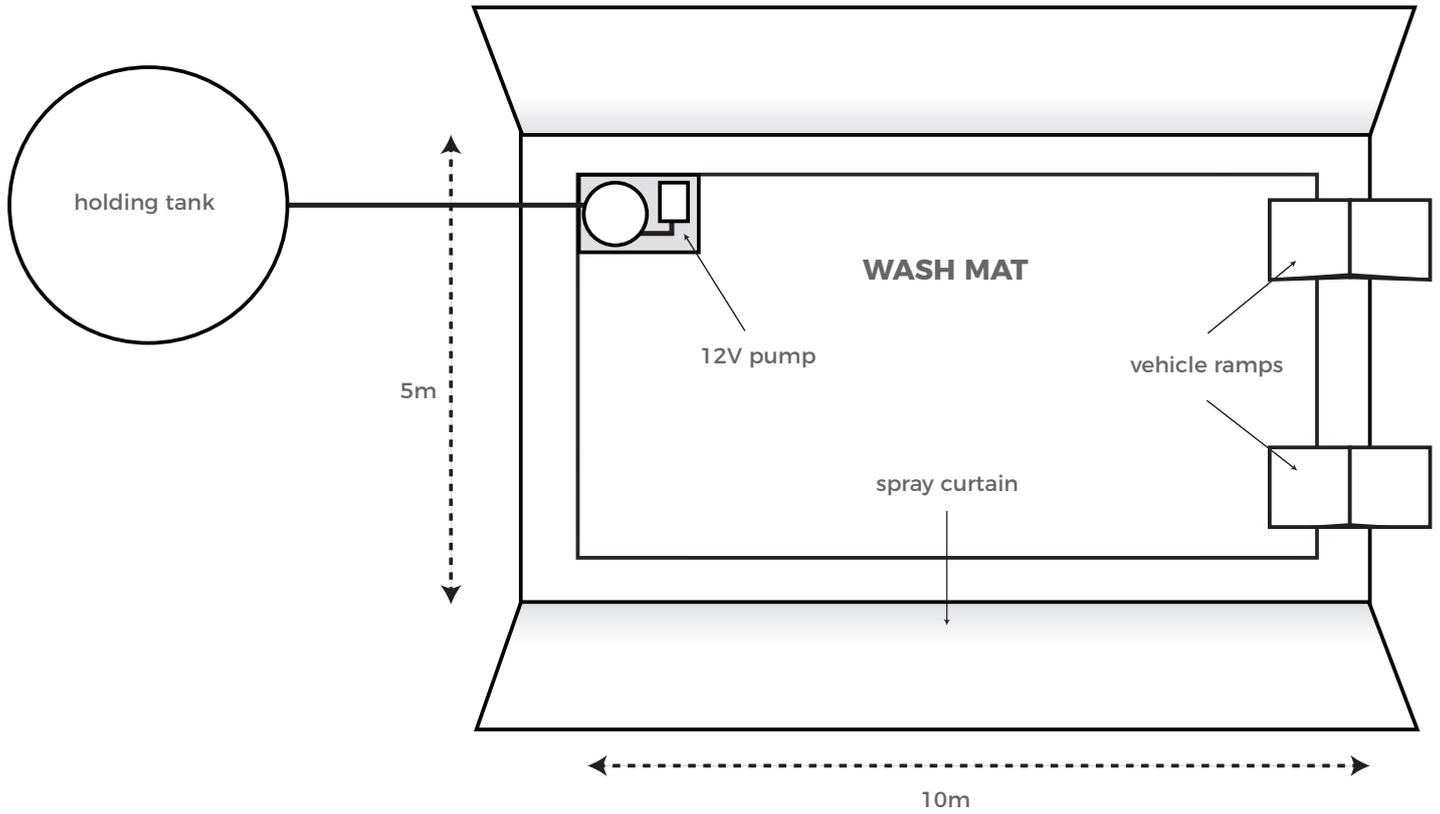

\*HOLDING TANK NOT INCLUDED

## WASHDOWN PROCEDURE

1. Wash down a vehicle on the wash mat.
2. As water collects on the wash mat the automatic wash bay pump will pump water
3. off the mat to a holding tank.
4. When the tank is close to full call in a pump truck and have the contents of the tank taken off site.

| SPECIFICATIONS   |                                   |
|------------------|-----------------------------------|
| DIMENSIONS       | 5M X 10M                          |
| MATERIAL         | PVC OR HD PVC                     |
| BUNDED PERIMETER | PREMIUM QUALITY FOAM EDGE PROFILE |
| SPRAY CURTAINS   | X2                                |
| VEHICLE RAMPS    | X2                                |

| PUMP SPECIFICATIONS |                        |
|---------------------|------------------------|
| POWER               | 12V                    |
| BASE PLATE          | STAINLESS STEEL        |
| AUTOMATION          | AUTOMATIC FLOAT SWITCH |
| CABLE LENGTH        | 3M                     |

