


TEWMTS - PORTABLE WASH BAY

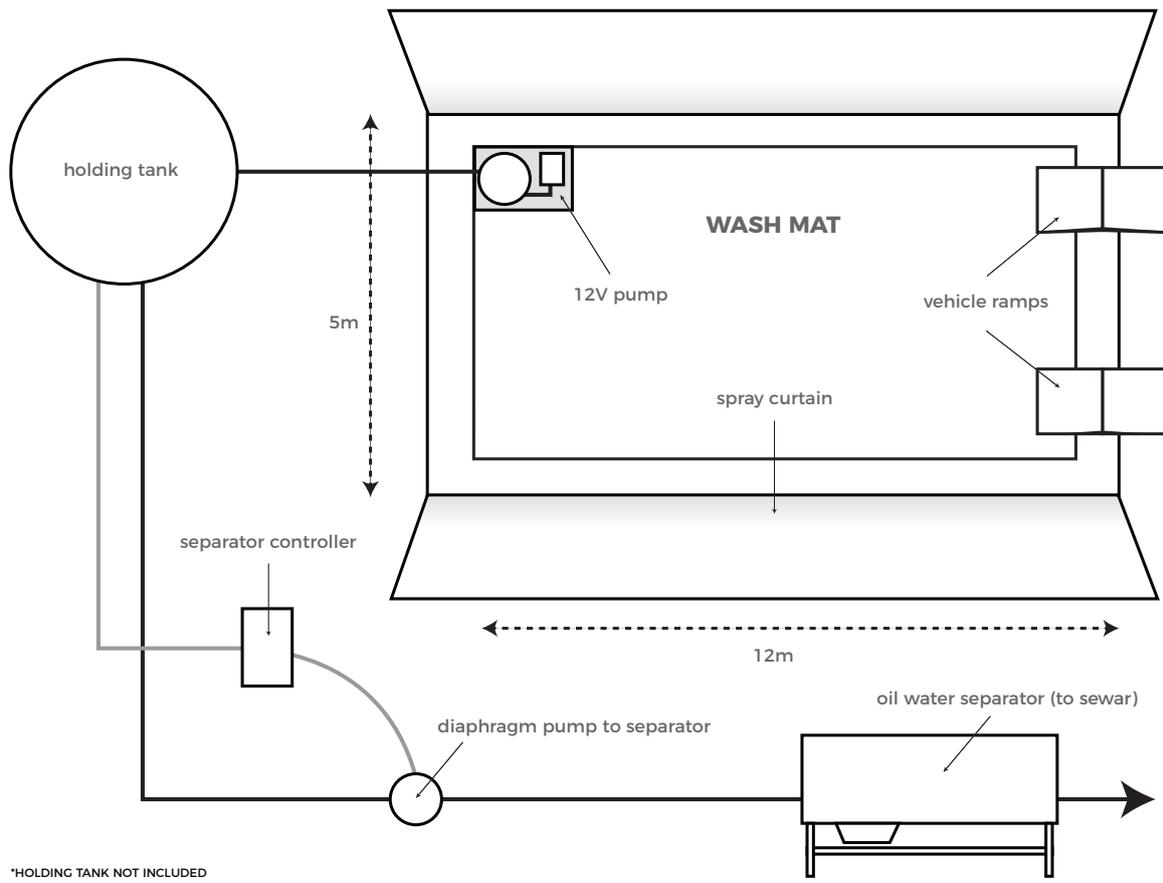

WASHDOWN PROCEDURE

1. Wash down a vehicle on the wash mat.
2. As water collects on the wash mat the automatic wash bay pump will pump water
3. off the mat to a holding tank.
4. When the tank is close to full call in a pump truck and have the contents of the tank taken off site.

SPECIFICATIONS	
DIMENSIONS	5M X 12M
MATERIAL	PVC OR HD PVC
BUNDED PERIMETER	PREMIUM QUALITY FOAM EDGE PROFILE
SPRAY CURTAINS	X2
VEHICLE RAMPS	X2

PUMP SPECIFICATIONS	
POWER	12V
BASE PLATE	STAINLESS STEEL
AUTOMATION	AUTOMATIC FLOAT SWITCH
CABLE LENGTH	3M

